


## AM22

Tuerca deslizante, A 41, KHA 41, KHAL 41

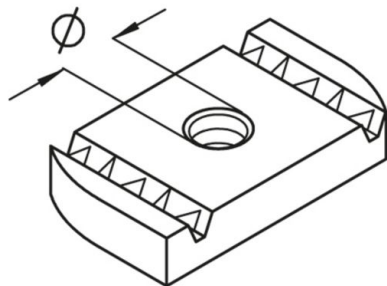

### Zincado plateado ISO 4042

| Product  | Ø     | t       | G          |
|----------|-------|---------|------------|
| AM22 M6  | 6 mm  | 6,00 mm | 2,6 kg/100 |
| AM22 M8  | 8 mm  | 6,00 mm | 2,4 kg/100 |
| AM22 M10 | 10 mm | 8,00 mm | 3,3 kg/100 |
| AM22 M12 | 12 mm | 9,50 mm | 3,9 kg/100 |

### Galvanizado por inmersión en caliente según DIN EN ISO 1461

| Product   | Ø     | t       | G          |
|-----------|-------|---------|------------|
| AM22 M6F  | 6 mm  | 6,00 mm | 2,8 kg/100 |
| AM22 M8F  | 8 mm  | 6,00 mm | 2,6 kg/100 |
| AM22 M10F | 10 mm | 8,00 mm | 3,5 kg/100 |
| AM22 M12F | 12 mm | 9,00 mm | 3,9 kg/100 |

### Acero inoxidable, n.º de material 1.4571/1.4404 (V4A)

| Product    | Ø     | t       | G          |
|------------|-------|---------|------------|
| AM22 M6E4  | 6 mm  | 6,00 mm | 2,6 kg/100 |
| AM22 M8E4  | 8 mm  | 6,00 mm | 2,4 kg/100 |
| AM22 M10E4 | 10 mm | 8,00 mm | 3,5 kg/100 |

Page 1

PUK-Portacables, S.L.

Pol. Ind. Barcelonés, C/ Noguera, Nave 1, 08630 Abrera | España

Teléfono +34 93 7703490/91 | Fax +34 93 7703518 | puk@pukportacables.com | pukportacables.com



Date of issuance: 05.07.2025. Errors and technical modifications reserved.

| Product    | Ø     | t       | G          |
|------------|-------|---------|------------|
| AM22 M12E4 | 12 mm | 9,50 mm | 4,0 kg/100 |

Ø: Diámetro  
t: Espesor de material  
G: Peso

## DETAILS / APPLICATIONS

