


## AMF18

Tuerca deslizante con muelle, A7/ A8

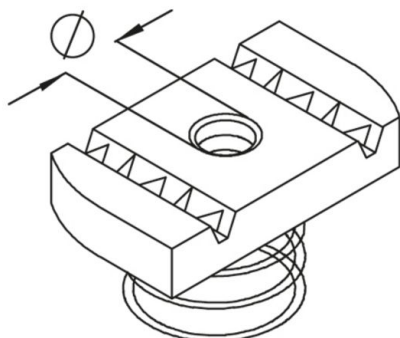

### Zincado plateado ISO 4042

| Product   | Ø     | t       | G          |
|-----------|-------|---------|------------|
| AMF18 M6  | 6 mm  | 6,00 mm | 2,7 kg/100 |
| AMF18 M8  | 8 mm  | 6,00 mm | 2,5 kg/100 |
| AMF18 M10 | 10 mm | 8,00 mm | 3,4 kg/100 |
| AMF18 M12 | 12 mm | 9,50 mm | 4,3 kg/100 |

### Galvanizado por inmersión en caliente según DIN EN ISO 1461

| Product    | Ø     | t       | G          |
|------------|-------|---------|------------|
| AMF18 M6F  | 6 mm  | 6,00 mm | 2,9 kg/100 |
| AMF18 M8F  | 8 mm  | 6,00 mm | 2,7 kg/100 |
| AMF18 M10F | 10 mm | 8,00 mm | 3,6 kg/100 |
| AMF18 M12F | 12 mm | 9,50 mm | 4,6 kg/100 |

Ø: Diámetro  
t: Espesor de material  
G: Peso

## DETAILS / APPLICATIONS



