


DSAHFEF8 3

Suspensión por cable con el extremo roscado M8 y cierre universal

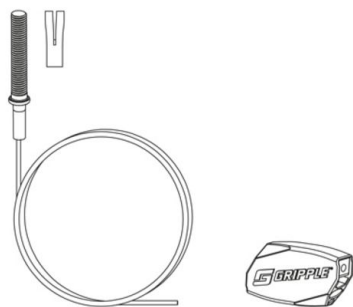

Zincado plateado ISO 4042

Product	L	P _{max}	Gripple Lastklasse	G
DSAHFEF8 31GV	1000 mm	0,88 kN	3	0,10 kg
DSAHFEF8 32GV	2000 mm	0,88 kN	3	0,14 kg
DSAHFEF8 33GV	3000 mm	0,88 kN	3	0,18 kg
DSAHFEF8 34GV	4000 mm	0,88 kN	3	0,22 kg
DSAHFEF8 35GV	5000 mm	0,88 kN	3	0,26 kg
DSAHFEF8 310GV	10000 mm	0,88 kN	3	0,42 kg

L: Longitud

P_{max}: Carga máx.

Gripple Lastklasse:

G: Peso

