


DSAXPSP 2

Suspensión por cable con anclaje transversal y cierre rápido

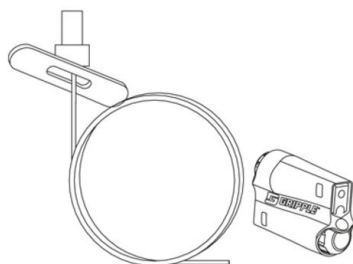

Zincado plateado ISO 4042

Product	L	P _{max}	Gripple Lastklasse	G
DSAXPSP 21GV	1000 mm	0,44 kN	2	0,05 kg
DSAXPSP 22GV	2000 mm	0,44 kN	2	0,06 kg
DSAXPSP 23GV	3000 mm	0,44 kN	2	0,08 kg
DSAXPSP 24GV	4000 mm	0,44 kN	2	0,10 kg
DSAXPSP 25GV	5000 mm	0,44 kN	2	0,12 kg
DSAXPSP 210GV	10000 mm	0,44 kN	2	0,21 kg

L: Longitud

P_{max}: Carga máx.

Gripple Lastklasse:

G: Peso

