


G 60

Bandeja de rejilla

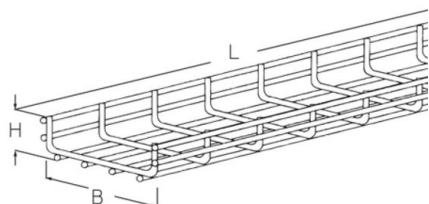

Bandeja rejilla en forma de U. Conductividad eléctrica comprobada según DIN EN 61537

Este artículo también está disponible en acero inoxidable AISI 304.



Zincado plateado

Product	H	B	L	t	G
G 60-06ZP	60 mm	60 mm	3000 mm	4,40 mm	1,95 kg
G 60-10ZP	60 mm	100 mm	3000 mm	4,40 mm	2,85 kg
G 60-15ZP	60 mm	150 mm	3000 mm	4,40 mm	3,53 kg
G 60-20ZP	60 mm	200 mm	3000 mm	4,40 mm	4,20 kg
G 60-30ZP	60 mm	300 mm	3000 mm	4,90 mm	6,15 kg
G 60-40ZP	60 mm	400 mm	3000 mm	4,90 mm	6,99 kg
G 60-50ZP	60 mm	500 mm	3000 mm	4,90 mm	9,01 kg
G 60-60ZP	60 mm	600 mm	3000 mm	4,90 mm	10,35 kg

Galvanizado por inmersión en caliente según DIN EN ISO 1461

Product	H	B	L	t	G
G 60-15F	60 mm	150 mm	3000 mm	4,40 mm	4,29 kg
G 60-20F	60 mm	200 mm	3000 mm	4,40 mm	5,40 kg
G 60-30F	60 mm	300 mm	3000 mm	4,90 mm	6,65 kg
G 60-40F	60 mm	400 mm	3000 mm	4,90 mm	7,90 kg
G 60-50F	60 mm	500 mm	3000 mm	4,90 mm	9,84 kg
G 60-60F	60 mm	600 mm	3000 mm	4,90 mm	11,10 kg
G 60-06F	60 mm	60 mm	3000 mm	4,40 mm	2,10 kg
G 60-10F	60 mm	100 mm	3000 mm	4,40 mm	3,18 kg

Page 1

PUK-Portacables, S.L.

Pol. Ind. Barcelonés, C/ Noguera, Nave 1, 08630 Abrera | España


Teléfono +34 93 7703490/91 | Fax +34 93 7703518 | puk@pukportacables.com | pukportacables.com



Date of issuance: 07.07.2025. Errors and technical modifications reserved.

H: Altura
B: Anchura
L: Longitud
t: Espesor de material
G: Peso

DETAILS / APPLICATIONS

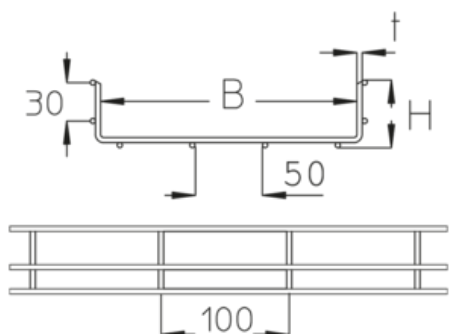

OPTIONAL ACCESSORIES

GV, RTG 60, GVL, MP-G, KLU



¡No pisar!

