


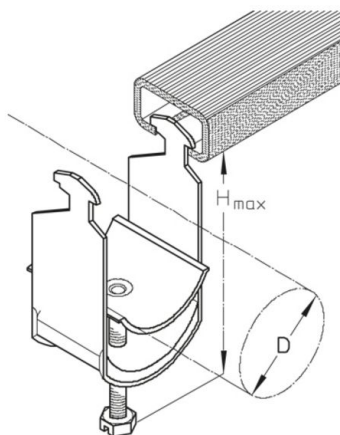

HB

Abrazadera para fijación a teleraíles

Abrazadera con base grande a presión de acero galvanizado. Para la fijación en teleraíles con ranuras de 11 mm de ancho.

Galvanizado

Product	D	H _{max}	M	Cantidad de cables	G
12 HB	8-12 mm	41 mm	2 Nm	1	2,5 kg/100
16 HB	12-16 mm	46 mm	2 Nm	1	2,8 kg/100
20 HB	16-20 mm	50 mm	2 Nm	1	3,2 kg/100
24 HB	20-24 mm	54 mm	2 Nm	1	3,8 kg/100
28 HB	24-28 mm	58 mm	2 Nm	1	4,1 kg/100
32 HB	28-32 mm	63 mm	2 Nm	1	5,8 kg/100
36 HB	32-36 mm	67 mm	2 Nm	1	6,7 kg/100
40 HB	36-40 mm	71 mm	2 Nm	1	7,4 kg/100
44 HB	40-44 mm	81 mm	4 Nm	1	9,3 kg/100
48 HB	44-48 mm	85 mm	4 Nm	1	9,8 kg/100
52 HB	48-52 mm	90 mm	4 Nm	1	10,4 kg/100
56 HB	52-56 mm	94 mm	4 Nm	1	11,1 kg/100
60 HB	56-60 mm	98 mm	4 Nm	1	14,7 kg/100
64 HB	60-64 mm	102 mm	4 Nm	1	15,4 kg/100
70 HB	64-70 mm	109 mm	4 Nm	1	17,1 kg/100
12/2 HB	8-12 mm	58 mm	2 Nm	2	3,2 kg/100
16/2 HB	12-16 mm	67 mm	2 Nm	2	3,9 kg/100
20/2 HB	16-20 mm	75 mm	2 Nm	2	4,4 kg/100
24/2 HB	20-24 mm	84 mm	2 Nm	2	5,1 kg/100
28/2 HB	24-28 mm	92 mm	2 Nm	2	5,7 kg/100
32/2 HB	28-32 mm	101 mm	2 Nm	2	8,7 kg/100

Page 1

PUK-Portacables, S.L.

Pol. Ind. Barcelonés, C/ Noguera, Nave 1, 08630 Abrera | España

Teléfono +34 93 7703490/91 | Fax +34 93 7703518 | puk@pukportacables.com | pukportacables.com



Date of issuance: 05.07.2025. Errors and technical modifications reserved.

Product	D	H _{max}	M	Cantidad de cables	G
36/2 HB	32-36 mm	109 mm	2 Nm	2	9,8 kg/100
40/2 HB	36-40 mm	117 mm	2 Nm	2	10,5 kg/100
44/2 HB	40-44 mm	127 mm	4 Nm	2	12,9 kg/100
48/2 HB	44-48 mm	135 mm	4 Nm	2	13,5 kg/100
52/2 HB	48-52 mm	144 mm	4 Nm	2	13,7 kg/100
56/2 HB	52-56 mm	152 mm	4 Nm	2	16,1 kg/100

Aluminio

Product	D	H _{max}	M	Cantidad de cables	G
12 HB-AL	8-12 mm	41 mm	1,5 Nm	1	1,7 kg/100
16 HB-AL	12-16 mm	46 mm	1,5 Nm	1	1,9 kg/100
20 HB-AL	16-20 mm	50 mm	1,5 Nm	1	2,5 kg/100
24 HB-AL	20-24 mm	54 mm	1,5 Nm	1	2,9 kg/100
28 HB-AL	24-28 mm	58 mm	1,5 Nm	1	3,2 kg/100
32 HB-AL	28-32 mm	63 mm	1,5 Nm	1	4,2 kg/100
36 HB-AL	32-36 mm	67 mm	1,5 Nm	1	4,5 kg/100
40 HB-AL	36-40 mm	71 mm	1,5 Nm	1	4,8 kg/100
44 HB-AL	40-44 mm	81 mm	3,0 Nm	1	6,4 kg/100
48 HB-AL	44-48 mm	85 mm	3,0 Nm	1	7 kg/100
52 HB-AL	48-52 mm	90 mm	3,0 Nm	1	9,8 kg/100
56 HB-AL	52-56 mm	94 mm	3,0 Nm	1	10,4 kg/100

D: Diámetro

H_{max}: Altura máx.


M: Momento de apriete

Cantidad de cables: Cantidad máx. de cables instalables

G: Peso

DETAILS / APPLICATIONS



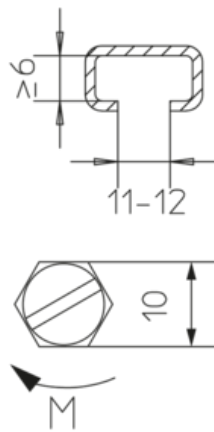

OPTIONAL ACCESSORIES

B 3, B 6

