

## SKL M

Bornas de fijación

Galvanizado por inmersión en caliente según DIN EN ISO 1461

| Product       | k         | P <sub>max</sub>                   | M     | G            |
|---------------|-----------|------------------------------------|-------|--------------|
| SKL MF        | 5 - 25 mm | 10 kN                              | 35 Nm | 0,45 kg/Satz |
| incl.:        |           |                                    |       |              |
| 2x SES 10X55F |           | Tornillo cabeza hexagonal, DIN 933 |       |              |
| 2x SEM 10F    |           | Tuerca hexagonal, DIN 934          |       |              |
| 2x UVS M10X24 |           | Arandela bloqueante                |       |              |

Acero inoxidable, n.º de material 1.4571/1.4404 (V4A)

| Product        | k         | P <sub>max</sub>                   | M     | G            |
|----------------|-----------|------------------------------------|-------|--------------|
| SKL ME4        | 5 - 25 mm | 10 kN                              | 35 Nm | 0,46 kg/Satz |
| incl.:         |           |                                    |       |              |
| 2x SES 10X55E4 |           | Tornillo cabeza hexagonal, DIN 933 |       |              |
| 2x SEM 10E4    |           | Tuerca hexagonal, DIN 934          |       |              |
| 2x UVS M10X24  |           | Arandela bloqueante                |       |              |

**k:** Área de apriete


**P<sub>max</sub>:** Carga máx.

**M:** Momento de apriete

**G:** Peso



## DETAILS / APPLICATIONS

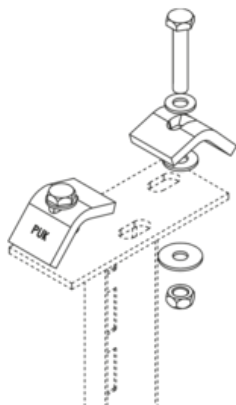

## OPTIONAL ACCESSORIES

KDU 60, KDU 60, KDU 60, KHA 2, HS22

