


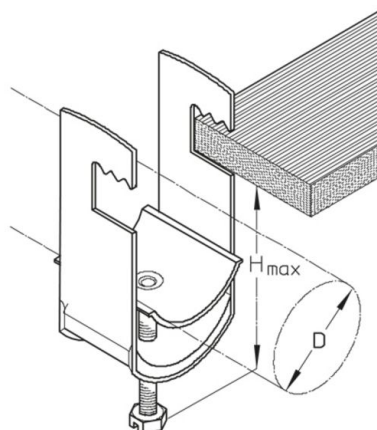

U

Abrazadera para cables para fijación a perfiles planos

Abrazadera con base grande a presión de acero galvanizado.
Para la fijación en perfiles planos de hasta 12 mm.

Galvanizado

Product	D	H _{max}	M	Cantidad de cables	G
12 U	8-12 mm	41 mm	2 Nm	1	3,1 kg/100
16 U	12-16 mm	46 mm	2 Nm	1	3,4 kg/100
20 U	16-20 mm	50 mm	2 Nm	1	3,8 kg/100
24 U	20-24 mm	54 mm	2 Nm	1	4,3 kg/100
28 U	24-28 mm	58 mm	2 Nm	1	4,5 kg/100
32 U	28-32 mm	63 mm	2 Nm	1	7,1 kg/100
36 U	32-36 mm	67 mm	2 Nm	1	7,5 kg/100
40 U	36-40 mm	71 mm	2 Nm	1	8,1 kg/100
44 U	40-44 mm	81 mm	4 Nm	1	10,5 kg/100
48 U	44-48 mm	85 mm	4 Nm	1	10,8 kg/100
52 U	48-52 mm	90 mm	4 Nm	1	11,5 kg/100
56 U	52-56 mm	94 mm	4 Nm	1	12,2 kg/100
60 U	56-60 mm	98 mm	4 Nm	1	16,8 kg/100
64 U	60-64 mm	102 mm	4 Nm	1	17,4 kg/100
70 U	64-70 mm	109 mm	4 Nm	1	18,5 kg/100
76 U	70-76 mm	113 mm	4 Nm	1	24,8 kg/100
82 U	76-82 mm	119 mm	4 Nm	1	27,2 kg/100
88 U	82-88 mm	125 mm	4 Nm	1	28,3 kg/100
94 U	88-94 mm	131 mm	4 Nm	1	31 kg/100
100 U	94-100 mm	137 mm	4 Nm	1	33,6 kg/100
110 U	100-110 mm	157 mm	4 Nm	1	35,6 kg/100

Page 1

PUK-Portacables, S.L.

Pol. Ind. Barcelonés, C/ Noguera, Nave 1, 08630 Abrera | España

Teléfono +34 93 7703490/91 | Fax +34 93 7703518 | puk@pukportacables.com | pukportacables.com



Date of issuance: 06.07.2025. Errors and technical modifications reserved.

Product	D	H _{max}	M	Cantidad de cables	G
120 U	110-120 mm	167 mm	4 Nm	1	38,4 kg/100
150 U	145-150 mm	203 mm	6 Nm	1	108,2 kg/100
175 U	170-175 mm	228 mm	6 Nm	1	133,1 kg/100
12/2 U	8-12 mm	58 mm	2 Nm	2	3,9 kg/100
16/2 U	12-16 mm	67 mm	2 Nm	2	4,4 kg/100
20/2 U	16-20 mm	75 mm	2 Nm	2	5 kg/100
24/2 U	20-24 mm	84 mm	2 Nm	2	5,7 kg/100
28/2 U	24-28 mm	92 mm	2 Nm	2	6,1 kg/100
32/2 U	28-32 mm	101 mm	2 Nm	2	9,7 kg/100
36/2 U	32-36 mm	109 mm	2 Nm	2	10,6 kg/100
40/2 U	36-40 mm	117 mm	2 Nm	2	11,5 kg/100
44/2 U	40-44 mm	127 mm	4 Nm	2	13,4 kg/100
48/2 U	44-48 mm	135 mm	4 Nm	2	14,9 kg/100
52/2 U	48-52 mm	144 mm	4 Nm	2	15,8 kg/100
56/2 U	52-56 mm	152 mm	4 Nm	2	17 kg/100
12/3 U	8-12 mm	71 mm	2 Nm	3	4,5 kg/100
16/3 U	12-16 mm	85 mm	2 Nm	3	5,4 kg/100
20/3 U	16-20 mm	97 mm	2 Nm	3	6,2 kg/100
24/3 U	20-24 mm	110 mm	2 Nm	3	7,1 kg/100
28/3 U	24-28 mm	122 mm	2 Nm	3	7,9 kg/100

Aluminio

Product	D	H _{max}	M	Cantidad de cables	G
12 U-AL	8-12 mm	41 mm	1,5 Nm	1	1,7 kg/100
16 U-AL	12-16 mm	46 mm	1,5 Nm	1	2,0 kg/100
20 U-AL	16-20 mm	50 mm	1,5 Nm	1	2,3 kg/100
24 U-AL	20-24 mm	54 mm	1,5 Nm	1	2,5 kg/100
28 U-AL	24-28 mm	58 mm	1,5 Nm	1	2,8 kg/100
32 U-AL	28-32 mm	63 mm	1,5 Nm	1	4,1 kg/100
36 U-AL	32-36 mm	67 mm	1,5 Nm	1	4,5 kg/100
40 U-AL	36-40 mm	71 mm	1,5 Nm	1	4,9 kg/100
44 U-AL	40-44 mm	81 mm	3 Nm	1	5,2 kg/100



Product	D	H _{max}	M	Cantidad de cables	G
48 U-AL	44-48 mm	85 mm	3 Nm	1	5,5 kg/100
52 U-AL	48-52 mm	90 mm	3 Nm	1	6,1 kg/100
56 U-AL	52-56 mm	94 mm	3 Nm	1	6,5 kg/100

Acero inoxidable, n.º de material 1.4301 (V2A)

Product	D	H _{max}	M	Cantidad de cables	G
12 U-E	8-12 mm	41 mm	2 Nm	1	2,9 kg/100
16 U-E	12-16 mm	46 mm	2 Nm	1	3,3 kg/100
20 U-E	16-20 mm	50 mm	2 Nm	1	3,7 kg/100
24 U-E	20-24 mm	54 mm	2 Nm	1	4 kg/100
28 U-E	24-28 mm	58 mm	2 Nm	1	4,4 kg/100
32 U-E	28-32 mm	63 mm	2 Nm	1	5,4 kg/100
36 U-E	32-36 mm	67 mm	2 Nm	1	6,7 kg/100
40 U-E	36-40 mm	71 mm	2 Nm	1	7,6 kg/100
44 U-E	40-44 mm	81 mm	4 Nm	1	9,3 kg/100
48 U-E	44-48 mm	85 mm	4 Nm	1	9,9 kg/100
52 U-E	48-52 mm	90 mm	4 Nm	1	11 kg/100
56 U-E	52-56 mm	94 mm	4 Nm	1	11,3 kg/100

D: Diámetro

H_{max}: Altura máx.

M: Momento de apriete

Cantidad de cables: Cantidad máx. de cables instalables

G: Peso

DETAILS / APPLICATIONS



