


KHA 2

Teleraíl 50x31 mm, perforado

Teleraíl 50x31x3,25 mm, con perforaciones continuas de 13x26, ranuras de 22 mm de ancho

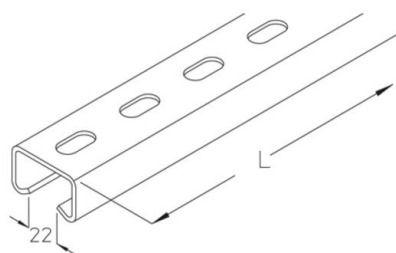

Galvanizado por inmersión en caliente según DIN EN ISO 1461

Product	H	B	L	t	G
KHA 2-05F	31 mm	50 mm	500 mm	3,25 mm	1,5 kg
KHA 2-10F	31 mm	50 mm	1000 mm	3,25 mm	3 kg
KHA 2-15F	31 mm	50 mm	1500 mm	3,25 mm	4,5 kg
KHA 2-20F	31 mm	50 mm	2000 mm	3,25 mm	6 kg
KHA 2-30F	31 mm	50 mm	3000 mm	3,25 mm	9 kg
KHA 2-60F	31 mm	50 mm	6000 mm	3,25 mm	17,9 kg

H: Altura

B: Anchura



L: Longitud

t: Espesor de material

G: Peso

DETAILS / APPLICATIONS



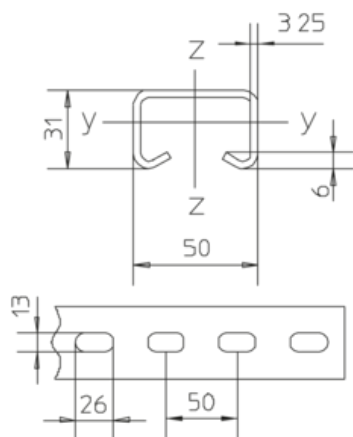

$$\begin{aligned} W_y &= 2.31 \text{ cm}^3 \\ W_z &= 5.40 \text{ cm}^3 \\ I_y &= 3.77 \text{ cm}^4 \\ I_z &= 13.49 \text{ cm}^4 \end{aligned}$$

OPTIONAL ACCESSORIES

HS22, SKS H

